




HYDRAULIC TARGET RETENTION SYSTEM

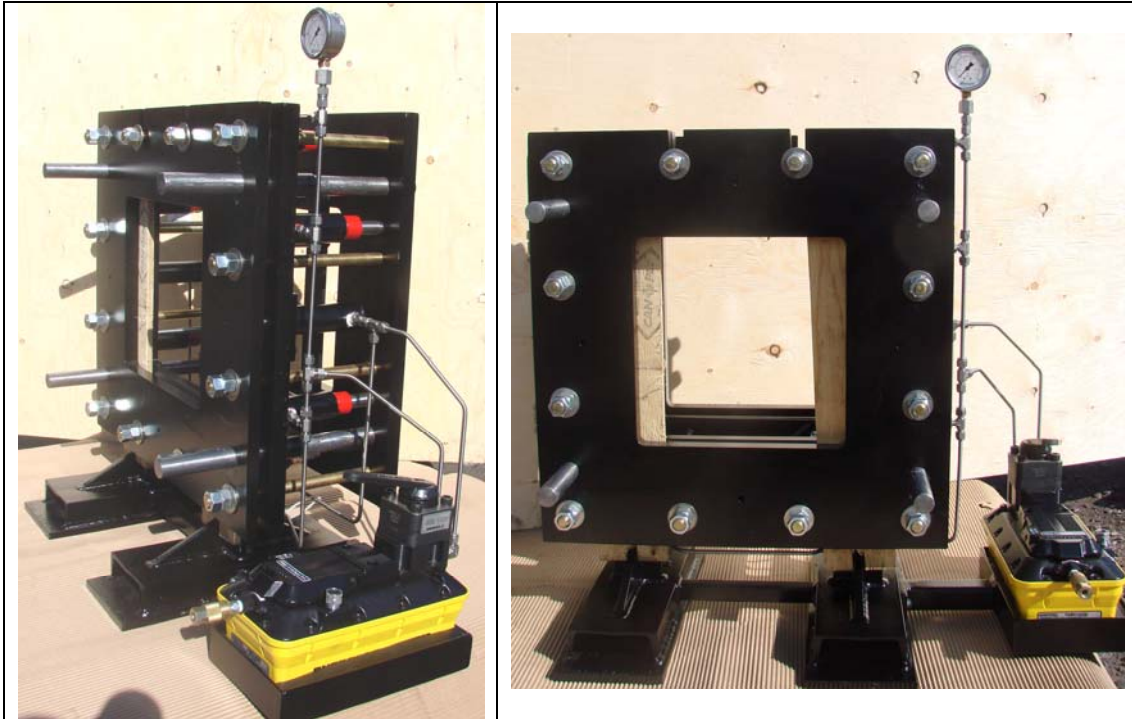

Hydraulic target retention clamping test frames are superior to conventional test frames for air back V50 fragment testing. The hydraulic clamping frames provide consistent, even tension and pressure through the test article. This type of frame is better suited for fragment testing than bullet testing. Uses standard shop air supply (90 psi) for activation.

2495 Del Zotto Avenue Ottawa, Ontario Canada, K1T 3V6 ☎ 613-822-8898 ext. 229
☎ 613-822-3672 ✉ hailom@bosik.com 🌐 www.bosik.com